



# TOUCH DYNAMIC

IMPROVING TOUCH TECHNOLOGY

## TP2000 Thermal Printer


tel: 888-508-6824

### Features

- Direct thermal
- Drop in paper loading
- High speed printing (200mm/s)
- Bar code printing
- Various interfaces : Serial, Parallel, USB, Ethernet , Wireless 802.11B
- Adjustable paper width (56mm~82.5mm)
- Epson Compatible



### Interface Options

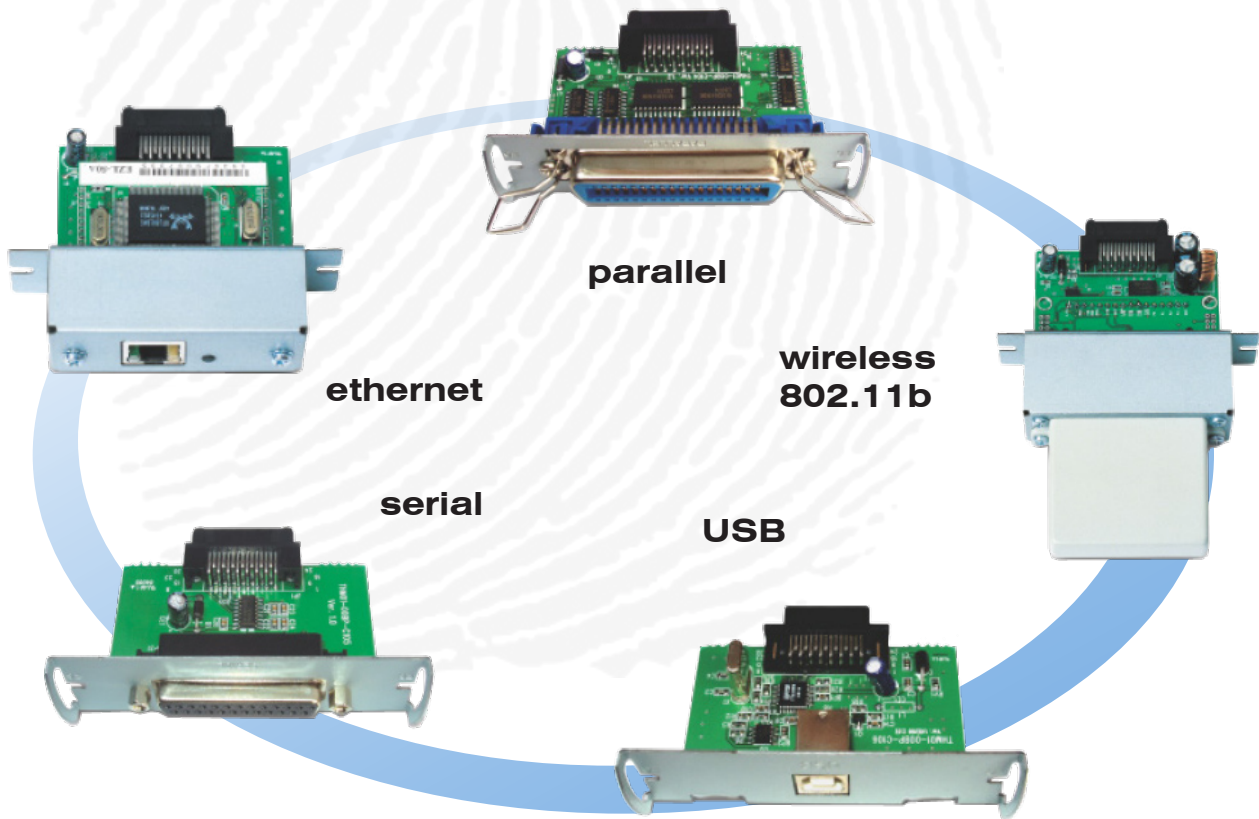

TOUCH DYNAMIC  
17 Camptown Rd.  
Irvington, NJ 07111

888-508-6824  
[www.touchdynamic.com](http://www.touchdynamic.com)

## TP2000 Specifications

PRINT METHOD		Direct thermal
PRINTING SPEED		200mm/sec
PRINTER BUFFER		4K (can be increased to 12K on special order)
DOT DENSITY		180DPI x 180DPI
DOT PITCH		0.141mm x 0.141mm
EFFECTIVE PRINTING WIDTH		72mm, 512 Dots/line
PRINTING DIRECTION		unidirectional with friction feed
CHARACTER PER LINE		Font A(12x24) 42 columns / Font B (9x17) 58 columns
PAPER	TYPE	Thermal Paper
	WIDTH	50mm ~ 82.5mm (2in ~ 3.5in)
	THICKNESS	0.06 ~ 0.09mm
	ROLL DIAMETER	Max 83mm (3.5in)
RELIABILITY	TPH LIFE	100km
	MCBF	60,000,000 lines
CHARACTER SET	ALPHANUMERIC CHARACTER	95
	EXTENDED GRAPHIC	128 x 18page
	INTERNATIONAL CHARACTER	14
BARCODE		EAN-8, EAN-13, CODE39, ITF, UPC-A, CODEBAR, CODE 93, CODE 128, PDF417(20)
EMULATION		ESC/POS COMMAND COMPATIBLE
DRAWER PORT		2 Ports
INTERFACE OPTIONS		Serial(RS-232C), Parallel(IEEE-1284), USB, Ethernet, Wireless 802.11b
POWER	TYPE	External SMPS
	AC	100-240V 50/60Hz
	DC	24V 2.5A
DIMENSION	W x D x H	152 x 204 x 150 mm (6.3 x 8.5 x 6.25 in)
WEIGHT	INCLUDE AUTO CUTTER	1.7Kg (3.75lbs)